## SL 608 Outdoor High Lifter

for outdoor and indoor use



SL 608 Outdoor High Lifter lifts up to 608 kg

- Off road with front-whell drive
- · Manoevrable with dual rear wheels
- Foam filled tyres
- Self-driven
- Electronic brake
- Lifting height 3700 mm (centre of yoke)
- 2 vacuum circuits with 2 pumps
- 4 Suction pads Ø 400 mm
- Ergonomic operation handle
- Waterproof according to ip65



doors, e.g. on construction sites.

In addition to the electrical extension, the carrying arm is fitted with a manual extension arm to provide extra long reach.



The lift has 100 mm sideshift for accurate adjustment when fitting the window

N.A. Christensensvej 39 DK-7900 Nykøbing Mors Tel.: +45 9772 2911

E-mail: smart@smartlift.dk

www.smartlift.dk



## SL 608 Outdoor High Lifter



The vacuum system is separated into two vacuum circuits for highest security. Showing vacuum circuits with blue and red vacuum hoses




The Smartlift is easily transported in a van or on a trailer




The yoke has movements in all directions



The lifting head has two settings, adjusted by means of two holes for the locking bolt. The lifting head can therefore be adjusted to tilt more towards the ceiling or floor.

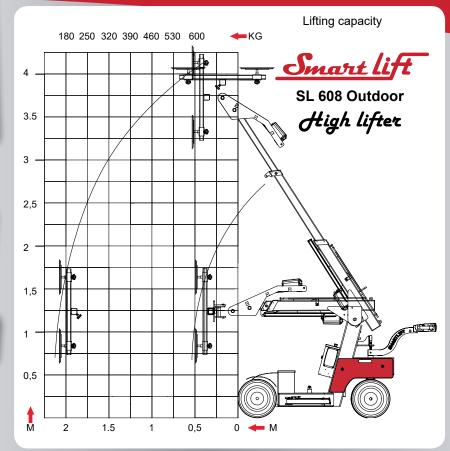

## Technical data Value Description 930 kg Weight Height 1530 mm Width (min) 840 mm Length (min) 22850 mm Extension of arm 700 + 900 mm 40° back/100° forward Tip from horizontal Speed regulation Stepless high/low Sideshift 100 mm Vacuum system 2 circuits Lifting height mounting 4080 mm 230 volt Charging voltage Integrated charger Ctek XT 14000 Charging time Approx 8 hours Battery(2 x 12v) 24 volt 2 x 105 A Running period Approx 20 hours Front-wheel drive 1200 Watt - AC Brake Elektronic Suction pads 4 unit Ø 400 mm Lifting capacity arm 608 kg/150 kg in/extended (1600 mm)

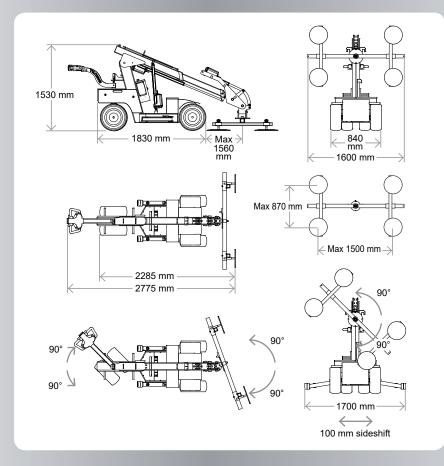

N.A. Christensensvej 39 DK-7900 Nykøbing Mors Tel.: +45 9772 2911

E-mail: smart@smartlift.dk

www.smartlift.dk

